


Flow rate curves

Inlet pressure (bar)

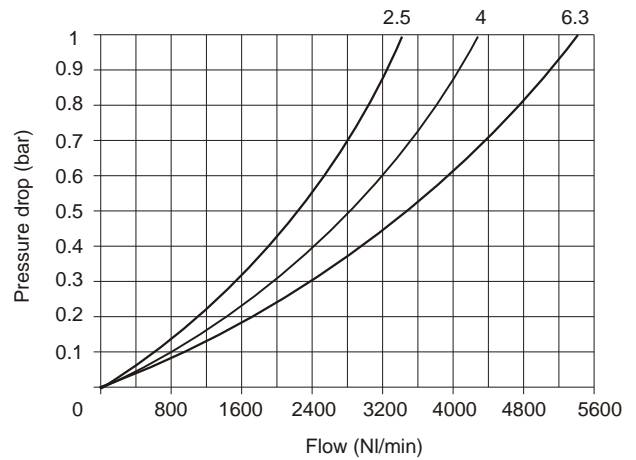

Technical characteristics

Connections	G 3/8" - G 1/2"
Max. inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Weight	gr. 435
Indicative oil drip rate	1 drop every 300/600 NI
Oil type	FD22 - HG32
Bowl capacity	80 cm ³
Assembly position	Vertical
Wall mounting screws	M6
Min. operational flow	20 NI/min
Max. fitting torque	40 Nm

Ordering code

17303

Connections
A = G 3/8"
B = G 1/2"

MA = Minimum oil level indicator N.O.
with plug connector
MC = Minimum oil level indicator N.C.
with plug connector

Note: on MA version the contact is open when the bowl is filled
on MC version the contact is closed when the bowl is filled

Example: **17303A**
Lubricator with G 3/8" connections.