


Construction and working characteristics

- Accurate capacity to maintain set pressure thanks to the double diaphragm scavenging system.
- Sensitivity combined with high relieving rates.
- High flow rate with extremely low pressure drop.
- Pressure adjusting lockable handle by simply pressing it downwards in the desired position.
- Body made with light alloy.
- Two pressure gauge connections with plug complete of seal.
- Ring nut for panel mounting.


Technical characteristics

Connections	G 1"
Max. inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature	50°C
Pressure gauge connections	G1/8"
Weight	gr.1900
Pressure range	0 - 2 bar 0 - 4 bar 0 - 8 bar 0 - 12 bar
Assembly position	Any
Wall fixing screws	M8

Flow rate curves

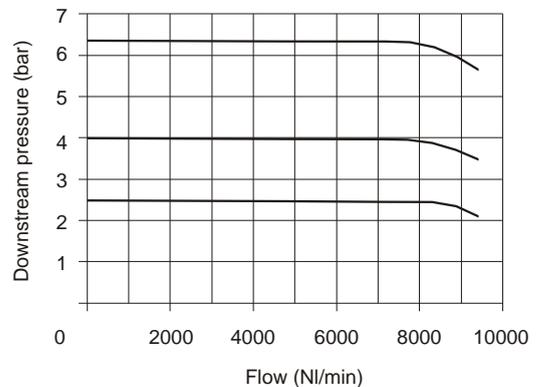


Adjustment characteristics

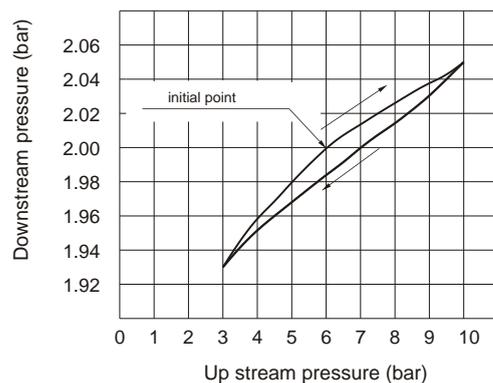

Ordering code

17402 . . .

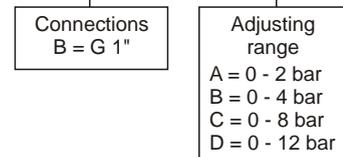

Example: **17402B.C**
Pressure regulator with G 1" connections, adjusting range 0 - 8 bar with relieving.